


MICRO HTS

2 way speaker • owners manual

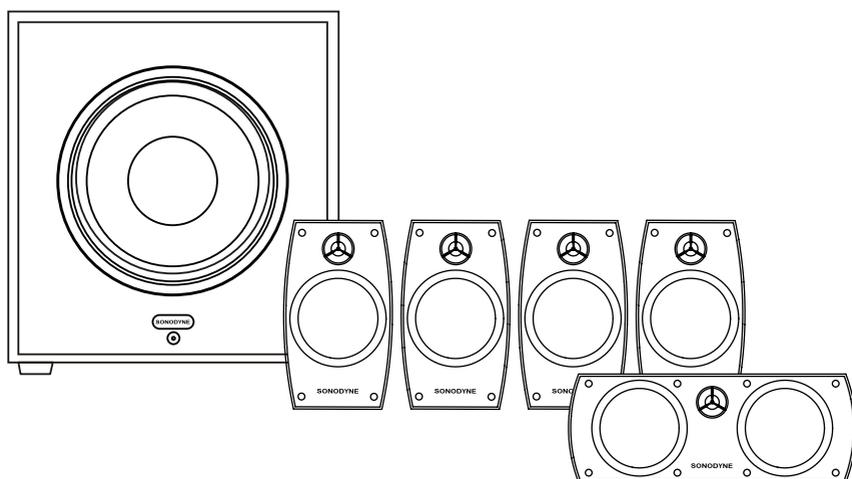

SONODYNE

INTRODUCTION

Thank you for choosing Sonodyne. By choosing the Micro HTS, you are ensured a natural sound reproduction. The Micro HTS is a complete home theatre speaker system with a powered subwoofer.

The package consists:

- 4 x MICRO 3001 main speakers and surround speakers
- 1 x MICRO 3002 center speaker
- 1 x ROARR 1108 powered subwoofer

UNPACKING

Your carton contains:

- 2 x 2 packs of Micro 3001 speaker (4 pcs)
- 1 x Micro 3002
- 1 x Roarr 1108

Each 2-pack Micro 3001 contains

- 2 x Micro 3001 speaker
- 2 x mounting bracket
- 1 x owners manual

Each Micro 3002 contains

- 1 x Micro 3002 speaker
- 1 x mounting bracket
- 1 x owners manual
- 1 x paper template

The ROARR 1108 contains

- 1 x Roarr 1108 powered subwoofer
- 4 x spikes and base
- 1 x mains cord
- 1 x tightening lever
- 1 x owners manual


For details on Micro3001 and Micro 3002, please refer to the operating manuals given above.

For details on Roarr 1108, please refer to the operating manual in the carton.

SPEAKER POSITIONING

For positioning the Micro 3001 main left and right speakers, place them at ear level, with at least 6 - 8 ft between and angled slightly toward the listening position or the sweet spot. For positioning the Micro 3001 surround left and surround right speakers, place the speakers to the left and right of your listening position. Angle them so that they point towards you for the best sound. If side placement is not possible, place them a few foot behind your listening position and face them forward. For details of mounting, please refer to the manual of Micro 3001. Experiment for best results.

For positioning the Micro 3002 center speaker place it at ear level, in the middle between the left and right speakers. For details of mounting, please refer to the manual of Micro 3002.

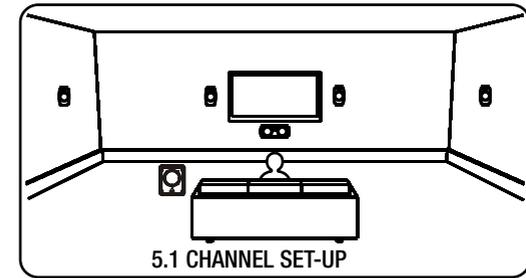


CONNECTIONS

Please connect your AV source to your AV amplifier; this could be through HDMI or optical or coaxial cables; please refer to your AVR guide for this setup

Please connect the 4 x Micro 3001 speakers to the left, right, surround left and surround right channels and the Micro 3002 to the center channels of your AV receiver, with speaker wires, as shown in the connection diagram. Please ensure that the correct polarity (+ to + and - to -) is maintained between AV receiver output and speaker input while making the connections.

Also please connect the subwoofer out of the AV receiver to either left or right input of Roarr 1108 with an RCA to RCA cable.

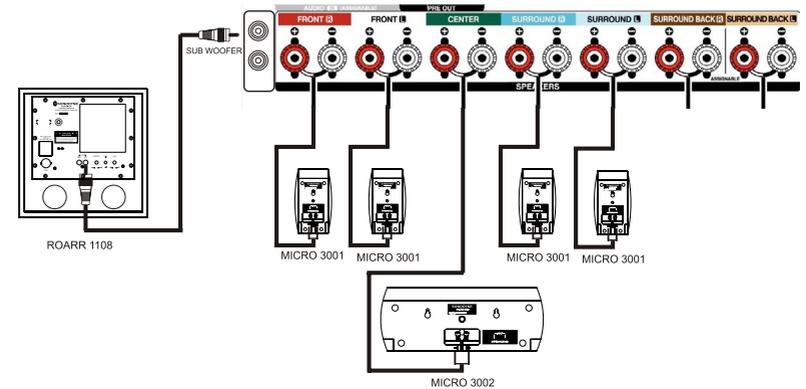

● set-up ●

SET-UP

To setup the levels, preferably through test tone, please refer to the AVR guide

Please set the L, C, R, LS, RS channels as SMALL SPEAKERS

Please ensure that the sound setting on your AVR is Dolby Digital / DTS / 5.1 mode (the AVR guide should serve in setting this mode)

Please make sure that post setup there is no audible distortion from any of the speakers.

SONODYNE

SONODYNE, India • H.O.: 98 NB Block E New Alipore, Kolkata 700053

 sonodyneofficial

 +91 9830855260

 SonodyneMusic

 response@sonodyne.com

 sonodyneofficial

 www.sonodyne.com

