


SONODYNE[®]
sound comes to life



Residential Solutions 2018

SONODYNE & ZAKIR HUSSAIN
PERFECT HARMONY

OUR STORY

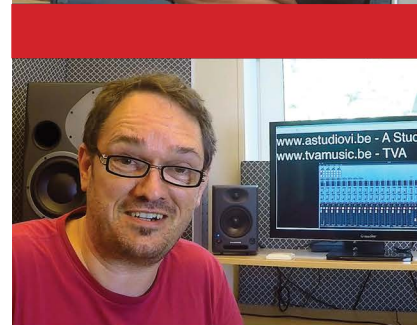

Our 48 year journey started in residential audio. Today, while we have made significant strides in professional audio, offering innovative solutions for your home remain at our core. We have paid attention to detail not only in the manufacturing process but also in designing products that sound natural yet powerful. The four ranges of offerings for your premium home theatre are:

REFERENCE: A range of high quality active speakers built on the lines of our critically acclaimed studio monitors. With focus on dynamics and detailing, this range offers no-compromise solutions for music, home theater and integrates easily with modern digital media.

PRIME: This is a collection of passive speakers in a variety of size and placement options for music and home theatre applications. They present innovations in transducer, port, and crossover designs across a unique range for serious music listeners.

POWERED SUBWOOFERS and **ELECTRONICS** serve to offer complete solutions with the above speaker ranges. This way the end user is assured of high-grade Sonodyne performance throughout.

Our sound journey is best manifested in our brand ambassador, Zakir Hussain. Mr. Hussain has taken Indian classical music to global heights, and embodies our core values: purpose, passion, perseverance, performance, prestige and pride. To learn more about this unique harmony, please do visit: www.sonodyne.com/zakirhussain

INDEX


SRP SERIES	Active speakers	1 & 2
SRT SERIES	Active speakers	3 & 4
AVANT SERIES	Passive speakers	5 & 6
SONUS SERIES	Passive speakers	7 & 8
IWO SERIES	In-wall/ on-wall passive speakers	9 & 10
GENIE SERIES	Satellite speakers	11
SIC SERIES	In-ceiling speakers	12
ROAR SERIES	Powered subwoofers	13
SUB SERIES	Powered subwoofers	14
DE4370	8 channel power amplifier	15
DE4348	Multi-channel processor	15
DSA 320	Stereo integrated amplifier	15

“Sonodyne conveys sound
in its purest form”

~ Ustad Zakir Hussain
Brand ambassador



SRP 200

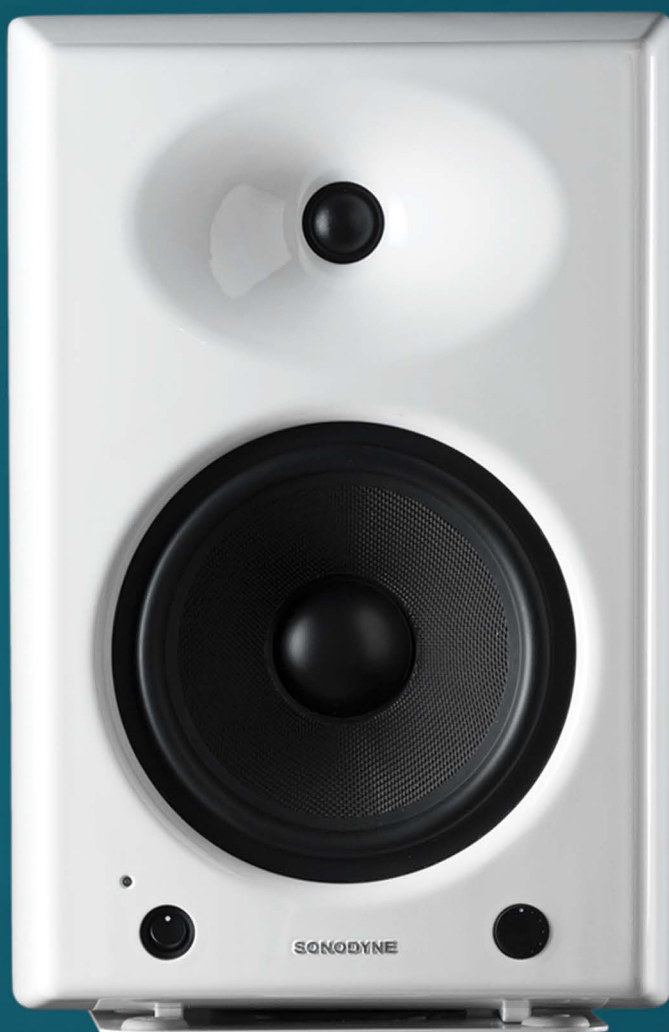

SRP 205



SRP 203



SRP 201

This is a range of multi-functional active speakers. They sound stunning. They look stunning. And there is a size for every application.

From the smallest 201 to the largest 205, we have your sound need covered. Be it for high grade background or multi-room, or for multimedia, or pure stereo or home theatre, we can configure a solution using the SRPs. The solid aluminum enclosures give this range unparalleled rigidity and a compact, unique shape. The HF waveguide is unique for each transducer and an integral part of the moulded enclosure.

Colour and placement options make this a very installer-friendly range.



SRP 205



SRP 204



SRP 203



SRP 202



SRP 201

ENCLOSURE	Pressure die-cast aluminum	Pressure die-cast aluminum	Pressure die-cast aluminum	Pressure die-cast aluminum	Pressure die-cast aluminum
TRANSDUCERS	LF: Magnetically shielded 8" Kevlar cone woofer In die-cast chassis HF: 26mm silk dome neo-dymium magnet tweeter with custom waveguide	LF: Magnetically shielded 6.5" Kevlar cone woofer in die-cast chassis HF: 26mm silk dome neo-dymium magnet tweeter with custom waveguide	LF: Magnetically shielded 5.25" Kevlar cone woofer in die-cast chassis HF: 26mm silk dome neo-dymium magnet tweeter with custom waveguide	LF: Magnetically shielded 4.5" CURV cone woofer in die-cast chassis HF: 26mm silk dome neo-dymium magnet tweeter with custom waveguide	LF: Magnetically shielded 3" glass fibre cone woofer in die-cast chassis HF: 26mm silk dome neo-dymium magnet tweeter with custom waveguide
AMPLIFIER POWER	LF: 150W, HF: 100W	LF: 80W, HF: 50W	LF: 50W, HF: 50W	LF: 25W, HF: 25W	LF: 15W, HF: 15W
MAX. LONG TERM SPL	112dB (half space)	107dB (half space)	104dB (half space)	100dB (half space)	95dB (half space)
FREQ. RESPONSE (± 2 dB)	42Hz ~ 22kHz	55Hz ~ 22kHz	65Hz ~ 22kHz	75Hz ~ 22kHz	95Hz ~ 22kHz
COLOUR	Red / White / Black	Red / White / Black	Red / White / Black	Red / White / Black	Red / White / Black
DIMENSIONS (WxHxD) mm	291 x 434 x 280	250 x 340 x 240	210 x 279 x 181	160 x 232 x 155	125 x 184 x 120
WALL BRACKET	SRP WB 3	SRP WB 2	SRP WB 2	SRP WB 1	SRP WB 1
FLOOR STAND	SRP FS 2 W/B	SRP FS 2 W/B	SRP FS 1 W/B	SRP FS 1 W/B	SRP FS 1 W/B

SRT



The SRT Series is for the movie connoisseur. It's as close as you will ever get to reliving the big screen movie experience at home. By combining technologies with our professional studio range, the SRT Series brings loud and detailed sound in a shallow profile for easy installation in personal theatres.

SRT 302 and 301 feature trademark kevlar woofers, kevlar midranges and silk tweeters in a rotatable waveguide. Custom passive radiators are used to generate low frequencies from the shallow enclosure which minimises air flow noise. Each of the three frequency bandwidths is individually powered by its own amplifier which is kept in a separate enclosure. Internal processing is via DSP (Digital Signal Processing) which also allows for detailed user calibration.

SRT 301 and 302 are d'Appolito centre speaker configurations for SRT 301V and SRT 302V. The SRT 101 CS is a dedicated controller for SRT 101. The SRT 4200 is a 4 channel power amplifier that can drive 4 SRT 101s or 2 SRT S21s.



SRT 301V



SRT 301



SRT 302V



SRT 302

ENCLOSURE	Heavily braced double MDF sides with aluminium pillars as corners	Heavily braced double MDF sides with aluminium pillars as corners	Heavily braced double MDF sides with aluminium pillars as corners	Heavily braced double MDF sides with aluminium pillars as corners
TRANSDUCER COMPLEMENTS	Woofer: 2 x 6" kevlar cone woofer, Midrange: 1 x 4" kevlar cone in waveguide Tweeter: 26mm silk dome with waveguide, 2 x passive radiators	Woofer: 2 x 6" kevlar cone woofer, Midrange: 1 x 4" kevlar cone in waveguide Tweeter: 26mm silk dome with waveguide, 2 x passive radiators	Woofer: 2 x 8" kevlar cone woofer, Midrange: 1 x 5" kevlar cone in waveguide Tweeter: 26mm silk dome with waveguide 2 x passive radiators	Woofer: 2 x 8" kevlar cone woofer, Midrange: 1 x 5" kevlar cone in waveguide Tweeter: 26mm silk dome with waveguide 2 x passive radiators
AMPLIFIER POWER	LF:200W, MF:75W, HF:50W	LF:200W, MF:75W, HF:50W	LF:275W, MF:75W, HF:50W	LF:275W, MF:75W, HF:50W
AMPLIFIER ENCLOSURE	Separate, rack mountable	Separate, rack mountable	Separate, rack mountable	Separate, rack mountable
MAXIMUM SPL @ 1M	115dB	115dB	118 dB	118dB
FREQUENCY RESPONSE (±2dB)	55Hz ~ 22kHz	55Hz ~ 22kHz	45Hz ~ 22kHz	45Hz ~ 22kHz
COLOUR	Black	Black	Black	Black
DIMENSIONS (HxWxD) mm	770 x 390 x 152	390 x 770 x 152	1125 x 475 x 152	475 x 1125 x 152
MOUNTING OPTION	Wall mount bracket (included)	Wall mount bracket (included)	Wall mount bracket (included)	Wall mount bracket (included)



SRT 101



SRT S21



SRT S22

ENCLOSURE	MDF with extruded aluminium corners	MDF with extruded aluminium corners	MDF with extruded aluminium corners
TRANSDUCER COMPLEMENTS	Woofer: 1 x 6" kevlar, Tweeter: 25mm with waveguide	Subwoofer: 2 x 10"	Subwoofer: 2 x 12"
CONTINUOUS POWER HANDLING	150W at 8Ω	400W at 8Ω	600W at 8Ω
AMPLIFIER ENCLOSURE	Steel, powder coated	NA	NA
MAXIMUM SPL @ 1M	108dB	120dB	126dB
FREQUENCY RESPONSE (±2dB)	70Hz ~ 20kHz (-3dB)	40Hz ~ Crossover frequency	32Hz ~ Crossover frequency
COLOUR	Black	Black	Black
DIMENSIONS (HxWxD) mm	420 x 300 x 135	475 x 1125 x 185	537 x 1125 x 362
MOUNTING OPTION	Wall mount bracket (included)	Wooden stand	Wooden stand



SRT 101 CS

DESCRIPTION	4 channel processor for SRT 101
FREQUENCY RESPONSE	Customised for SRT 101
INPUTS & OUTPUTS	4 x XLR balanced
INDICATOR	Power LED
THD + NOISE	Less than 0.01%
GAIN	0dB
SIGNAL TO NOISE RATIO	100dB (A weighted)
DIMENSIONS (HxWxD) mm	44 x 482 x 165
ACCESSORIES	19" rack mounting



SRT 4200

DESCRIPTION	Multichannel power amplifier
POWER: 4Ω	4 x 200W
POWER: 8Ω	4 x 120W, 2 x 200W (bridged)
THD AT RATED POWER	0.1%
FREQUENCY RESPONSE (-3dB) on axis	15Hz ~ 60kHz
INPUTS - ANALOG	4 x XLR with Link (also XLR)
CHANNEL SEPARATION	> 70dB
SIGNAL TO NOISE RATIO (ANALOG)	> 104dB
DIMENSIONS (HxWxD) mm	87 x 482 x 400

AVANT



AVANT T2



Avant is a premium passive speaker range. With focus on performance and build quality, it employs high-grade components throughout for transparent, highly detailed audio reproduction. The range spells elegance. Slim and compact with subdued styling, they blend into modern interiors. Three beautifully finished avatars appear in white, black, and silver. With no compromise on performance, this range is ideal for both music and multichannel audio.



AVANT T2

2 x 6.5" high excursion woven PP woofer;
1 x 4" kevlar cone midrange
1 x 1" silk dome tweeter



AVANT S2



AVANT C2



AVANT C2

2 x 6.5" high excursion woven PP woofer;
1 x 4" kevlar cone midrange
1 x 1" silk dome tweeter



AVANT S2

2 x 4" PP cone woofer
2 x 1/2" poly cone tweeter

TRANSDUCER COMPLEMENTS			
NOMINAL IMPEDANCE	8Ω	8Ω	8Ω
SENSITIVITY	88dB	88dB	88dB
FREQUENCY RESPONSE (±3dB)	40Hz ~ 21kHz	60Hz ~ 21kHz	60Hz ~ 22kHz
RECOMMENDED AMPLIFIER POWER	50~200W/channel	50~200W/channel	50~150W/channel
COLOURS	White / Black / Silver	White / Black / Silver	White / Black / Silver
DIMENSIONS (HxWxD) mm	1064 x 200 x 305	250 x 520 x 252	320 x 375 x 162
NET WEIGHT	23kg	13.6kg	7.6kg

SONUS



SONUS 3165



This is a major upgrade to the very successful 2000 Series. The key innovations lie in new enclosures that provide improved bracing, hand picked drivers that provide better frequency extension and transients, and brand new crossovers for better transparency.

The range features 2 tower speakers, 2 centre speakers, a bookshelf and 2 surround models. Two colour options are available.

The new Sonus range is built to a level of sonic performance that will set a new standard in music and home theatre listening.



SONUS 3165

2 x 6" woofer, 1 x 5" midrange,
1 x 1" dome tweeter

8Ω

92dB

50Hz ~ 20kHz

60 ~ 150W

981 x 210 x 292

Front: Ash; Outer skin:
Option of Black ash or Rosewood

19.2kg



SONUS 3155

2 x 5" woofer, 1 x 5" midrange,
1 x 1" dome tweeter

8Ω

90dB

60Hz ~ 20kHz

60 ~ 125W

890 x 200 x 262

Front: Ash; Outer skin:
Option of Black ash or Rosewood

15kg



SONUS 3260

1 x 6" woofer, 1" dome tweeter
1 x 1" dome tweeter

8Ω

89dB

55Hz ~ 20kHz

60 ~ 100W

335 x 220 x 285

Front: Ash; Outer skin:
Option of Black ash or Rosewood

7kg

TRANSDUCER COMPLEMENTS

NOMINAL IMPEDANCE

SENSITIVITY 1W, 1M

FREQUENCY RESPONSE (-3dB), on axis

RECOMMENDED AMPLIFIER POWER

DIMENSIONS (HxWxD) mm

FINISH

NET WEIGHT



SONUS 3360

2 x 6" woofer,
1" dome tweeter

8Ω

90dB

55Hz ~ 20kHz

60 ~ 150W

Front: Ash; Outer skin:
Black ash or Rosewood

210 x 510 x 262

9.8kg



SONUS 3350

2 x 5" woofer,
1" dome tweeter

8Ω

90dB

65Hz ~ 20kHz

60 ~ 125W

Front: Ash; Outer skin:
Black ash or Rosewood

190 x 450 x 217

7.9kg



SONUS 3440

2 x 4" woofer,
2 x 1/2" dome tweeter

8Ω

88dB

75Hz ~ 20kHz

60 ~ 125W

Front: Ash; Outer skin:
Black ash or Rosewood

318 x 370 x 164

8.9kg



SONUS 3540

4" woofer,
1" dome tweeter

8Ω

85dB

80Hz ~ 20kHz

60 ~ 100W

Black

216 x 175 x 160

3.2kg

TRANSDUCER COMPLEMENTS

NOMINAL IMPEDANCE

SENSITIVITY 1W, 1M

FREQUENCY RESPONSE (-3dB), on axis

RECOMMENDED AMPLIFIER POWER

FINISH

DIMENSIONS (HxWxD) mm

NET WEIGHT

I.W.O.





IWO is pure innovation. In modern homes with premium space, these exquisite loudspeakers virtually disappear. Slim (less than 4") they can be mounted on the wall, AND, using a proprietary mount, can also be mounted IN WALL. Using minimal internal volume, this range produces big, detailed sound. So while the IWO does not intrude into your space, it does add a new dimension to your sound.

The IWO range has 6 passive speakers and 1 powered subwoofer. The 501 is the smallest, and the 511, 512 are larger models employing a 2.5 way crossover. The 521 and 522 are centre speaker arrangements of the 511 and 512. The 531 powered subwoofer utilises a 6" transducer and 80W amplifier to deliver big sound from its compact, wall-mountable enclosure.



IWO 501



IWO 502



IWO 511

TRANSDUCERS

1" tweeter,
3" woofer

FREQUENCY RESPONSE

80Hz ~ 20kHz

NOMINAL IMPEDANCE

8Ω

SENSITIVITY

80dB

RECOMMENDED AMPLIFIER POWER

40 ~ 80W

COLOURS

White/ Black

DIMENSIONS (H x W x D)

285 x 210 x 98

NET WEIGHT

3kg

IWO 502

1" dome tweeter,
4" woofer

70Hz ~ 20kHz

8Ω

85dB

60 ~ 100W

White/ Black

350 x 220 x 98

3.7kg

IWO 511

1" dome tweeter,
2 x 3" woofer

75Hz ~ 20kHz

8Ω

83dB

60 ~ 100W

White/ Black

500 x 220 x 98

5kg



IWO 512



IWO 521



IWO 522

TRANSDUCERS

1" dome tweeter, 2 x 4" woofer

FREQUENCY RESPONSE

70Hz ~ 19kHz

NOMINAL IMPEDANCE

8Ω

SENSITIVITY

88dB

RECOMMENDED AMPLIFIER POWER

60 ~ 120W

COLOURS

White/ Black

DIMENSIONS (H x W x D)

630 x 220 x 98

NET WEIGHT

6.4kg

1" dome tweeter, 2 x 3" woofer

75Hz ~ 20kHz

8Ω

82dB

60 ~ 100W

White/ Black

220 x 500 x 98

4.9kg

1" dome tweeter, 2 x 4" woofer

70Hz ~ 19kHz

8Ω

87dB



60 ~ 120W

White/ Black

220 x 630 x 98


6kg

GENIE 1

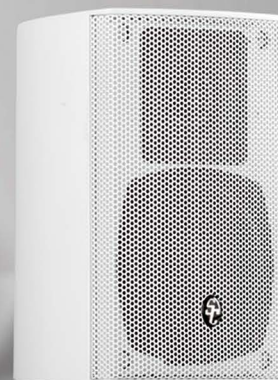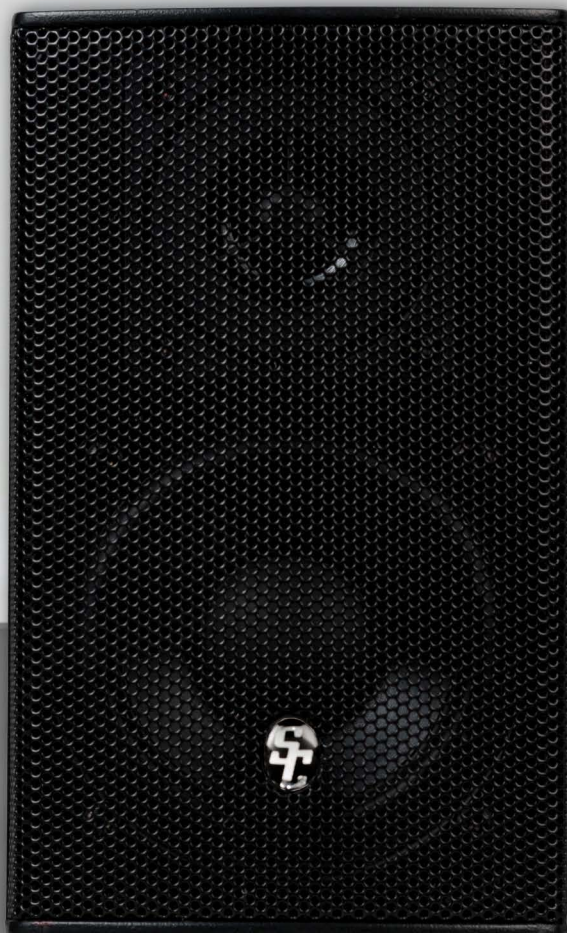

This tiny Genie has been cleverly designed to deliver big sound, and meet the needs of both high fidelity and lifestyle audio. The Genie 1 is a micro monitor ... with a difference. Due to its innovative enclosure and driver design, it has a frequency bandwidth unheard of in other speakers of its size. The Genie 1 clings to walls, stands upright on floors, and sits smartly atop tables. It can thus be negotiated into tight corners and premium floor spaces. Genie is available in white and black.

TRANSDUCER	1 x 3" coated cone woofer 1 x 0.5" polycarbonate dome tweeter
RECOMMENDED AMPLIFIER POWER	60W
MAXIMUM SPL @ 1M	87dB
FREQUENCY RESPONSE (+2dB)	130Hz ~ 20kHz
COLOUR	White, Black
DIMENSIONS (H x W x D) mm	148 x 88 x 110
NET WEIGHT	1.35kg

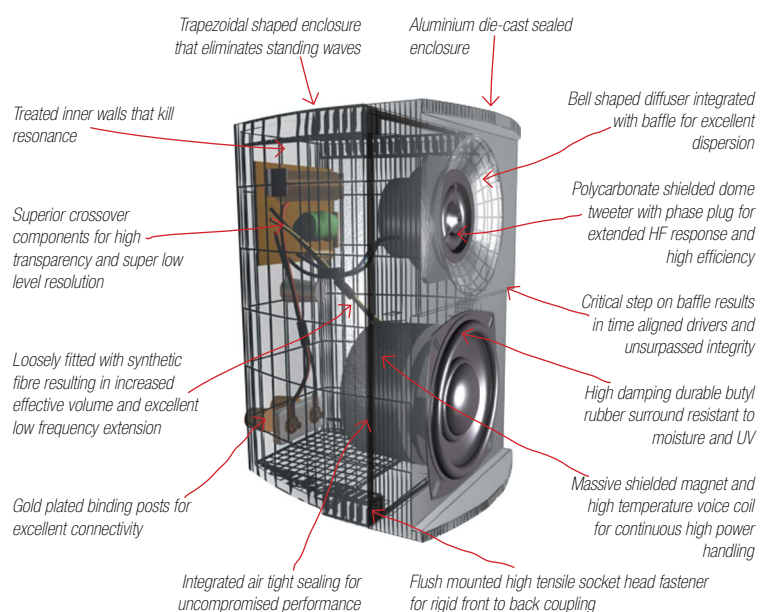

SIC 3300



The SIC 3300 Series features high performance ceiling speakers for home theatre and channel music applications. Both models in the range are two way designs with an elaborate crossover for critical midrange detailing. The moulded plastic enclosure has an unique waveguide rendering appreciable SPL without loss in low frequency. The swivel tweeter can be aimed for higher intelligibility at the listening position. Compact, powerful and elegantly finished with a magnetic grill, the new 3300 Series blends into your ceiling and reproduces music and movie content efficiently.



SIC 3360

2 way in-ceiling speaker with magnetic grill
1 x 6" coaxial speaker
60Hz ~ 21kHz
70Hz ~ 20kHz
91dB
105dB @ 30W
8Ω
60W
120 x 241
207
White
Ceiling mount
2.5kg



SIC 3380

2 way in-ceiling speaker with magnetic grill
1 x 8" coaxial speaker
45Hz ~ 21kHz
55Hz ~ 20kHz
92dB
106dB @ 30W
8Ω
60W
142 x 280
245
White
Ceiling mount
3.3kg

ROARR



ROARR 1312



ROARR 1210



ROARR 1108

The new range of Roarr subwoofers build on the decade long Roarr legacy of providing cost effective high performance subwoofers. The new range offers three models, with the largest model (1312) sporting a 300W Class AB amplifier with a 12" high excursion transducer. The other models feature 8" and 10" transducer with 100W and 150W amplification respectively. All models feature variable phase and frequency control. With oodles of power enclosed in a sturdy, smart enclosure, the new Roarr Series will bring you a lifetime of exhilarating audio.



ROARR 1108



ROARR 1210



ROARR 1312

TRANSDUCER	1 x 8"	1 x 10"	1 x 12"
AMPLIFIER POWER	100W	150W	300W
INPUTS	L & R unbalanced RCA type	L & R unbalanced RCA type	L & R unbalanced RCA type
MAXIMUM SPL @ 1M	109dB	112dB	116dB
LF RESPONSE (-3dB)	30Hz	26Hz	24Hz
FINISH	Front: Ash; Outer skin: Black ash or Rosewood	Front: Ash; Outer skin: Black ash or Rosewood	Front: Ash; Outer skin: Black ash or Rosewood
DIMENSIONS (WxHxD) mm	330 x 330 x 429	375 x 358 x 416	390 x 390 x 514

SUB



SUB S1010



SUB S1012

Between the 4 models of SUBs, we have ideal low frequency reinforcement partners for the Reference Range of active speakers. The high excursion transducers are designed for long hours of performance with focus on loudness and low frequency extension without audible distortion. Each model has two channel bass management for optimal level and frequency balance with the main channels. While the amplifiers are Class D, the power supply is a hefty linear toroidal transformer to minimize noise while maximising headroom and reliability. Beautifully finished in matching colours with the main channels, these subwoofers are ideal both for music and multichannel application.



S1006



S1008



S1010



S1012

TRANSDUCER	1 x 6"	1 x 8"	1 x 10"	1 x 12"
AMPLIFIER POWER	80W	80W	200W	300W
INPUTS	2 x RCA	2 x RCA	2 x XLR, 1 x RCA (LFE)	2 x XLR, 1 x RCA (LFE)
OUTPUTS	2 x RCA	2 x RCA	2 x XLR	2 x XLR
MAXIMUM SPL @ 1M	105dB	108dB	112dB	116dB
LF RESPONSE (-3dB)	44Hz	38Hz	34Hz	28Hz
COLOUR	Black/ White	Black/ White	Black/ White	Black/ White
DIMENSIONS (WxHxD) mm	270 x 270 x 320	310 x 310 x 360	350 x 420 x 450	400 x 400 x 555

For detailed specifications, please visit www.sonodyne.com | Due to continuous improvements, all specifications are subject to change

ELECTRONICS

DSA 320

The DSA 320 is a stereo integrated amplifier. At a slim 1.7" height, it employs a large toroidal transformer and intelligent heat sinking to deliver, noiselessly, oodles of power with excellent headroom. Both analogue and digital inputs (optical, coaxial, USB) are present with i/p selection and level control on remote. A minimalistic design with aluminum extrusion edges gives it an elegant look worthy of your mantelpiece.



POWER	125W x 2 @ 4Ω; 85W x 2 @ 8Ω
THD @ RATED POWER	< 0.1%
INPUTS	2 x stereo RCA, 1 x coaxial, 1 x optical SPDIF, 1 x USB
OUTPUTS	Pre out: XLR, Pre out: RCA, Phones: TRS
S/N RATIO, A-WEIGHTED	Analogue 90dB; Digital 100dB
DIMENSIONS (HxWxD)mm	45 x 445 x 380
NET WEIGHT	9.2kg



DE 4370

The DE 4370 is a multichannel power amplifier. This AB Class amplifier has a massive low noise toroidal transformer at its core. An ideal mate for the DE 4348 or as a stand alone multichannel power amplifier, the DE 4370 delivers undistorted high power for multichannel music and movie content.

- 8 channels of amplification
- 125W rms at 4Ω, 90W rms at 8Ω per channel
- Massive toroidal transformer
- Balanced and unbalanced inputs
- Trigger on/off
- Status indicator

DE 4348

The DE 4348 is a high performance multichannel processor that forms unique packages with Sonodyne active speakers. It is also very useful in custom installation for mini cinemas and corporate boardrooms

- HDMI/4K (2160 x 3840)
- High performance preamplifier with 7.2 unbalanced & balanced output
- Low magnetic flux leakage massive toroidal transformer
- On screen display (OSD)
- RS 232 control
- 32 bit (TI, CO.) DSP decoding: Dolby TrueHD/ Dolby Digital Plus/ Dolby Digital/ DTS-HD Master Audio/ DTS ES





“ Sonodyne are already well ahead on their journey to become one of the most successful manufacturers in their space.”

~ **Santhosh M, HiFi Today**



“ As the crown jewel of the Indian hi-fi manufacturing industry, Sonodyne has been at the top of its game for a while now.”

~ **What HiFi?**




“ I love Sonodyne. I love the quality of the product for the price you pay, they never let me down, you have to find your Sonodyne product for your own taste but you will never find a better product for the price.”

~ **George Necola, Gearslutz**



“ They're powerful, well-balanced, and honest to the ears; what more could one desire ”

~ **Recording Magazine, USA**

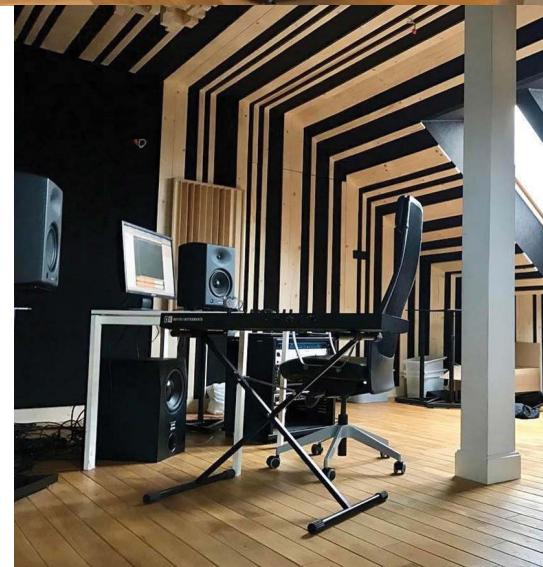

HAVE YOU TRIED SONOGUIDE



Let us help
you find the
perfect
audio system

www.sonodyne.com/sonoguide



Products of the **MUKHERJEE INNOVATION CENTRE**

SONODYNE, H.O.: 98 NB Block E New Alipore, Kolkata 700053, INDIA | T: 1-800-123-37-36
response@sonodyne.com | www.sonodyne.com

Visit SONODYNE INDIA for exciting offers and promotions

